

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

US PATENT & TRADEMARK OFFICE




3 0402 00085326 9

BACK REFERENCE

DICTIONARY OF

COMPUTING

THIRD EDITION

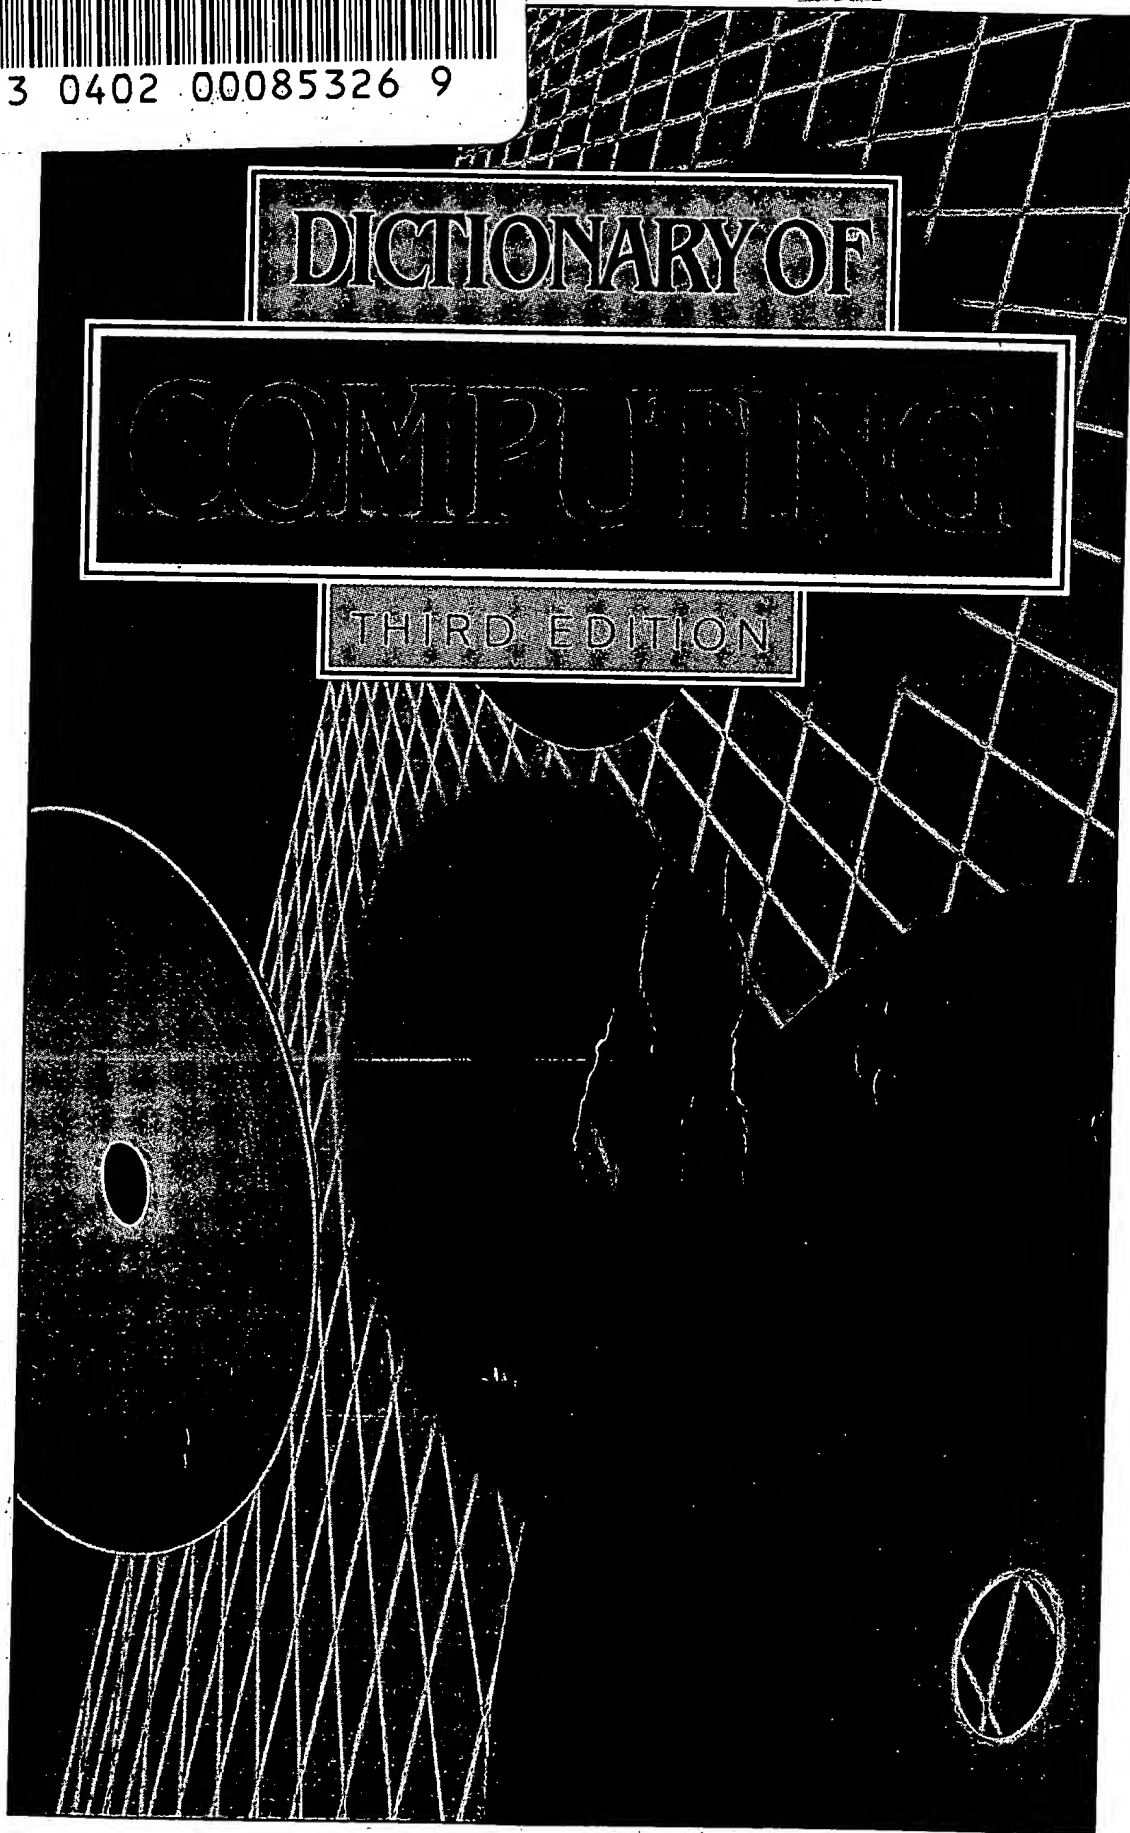

ERIC K18

GA

76.15

D5

1990

C.2

Oxford University Press, Walton Street, Oxford OX2 6DP

Oxford New York Toronto
Delhi Bombay Calcutta Madras Karachi
Kuala Lumpur Singapore Hong Kong Tokyo
Nairobi Dar es Salaam Cape Town
Melbourne Auckland Madrid

and associated companies in
Berlin Ibadan

Oxford is a trade mark of Oxford University Press

© Market House Books Ltd. 1983, 1986, 1990

First edition 1983

Second edition 1986

Third edition 1990

First issued as an Oxford University Press paperback 1991

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, without the prior permission in writing of Oxford University Press. Within the UK, exceptions are allowed in respect of any fair dealing for the purpose of research or private study, or criticism or review, as permitted under the Copyright, Designs and Patents Act, 1988, or in the case of reprographic reproduction in accordance with the terms of the licences issued by the Copyright Licensing Agency. Enquiries concerning reproduction outside these terms and in other countries should be sent to the Rights Department, Oxford University Press, at the address above

This book is sold subject to the condition that it shall not, by way of trade or otherwise, be lent, re-sold, hired out or otherwise circulated without the publisher's prior consent in any form of binding or cover other than that in which it is published and without a similar condition including this condition being imposed on the subsequent purchaser

British Library Cataloguing in Publication Data
Data available

Library of Congress Cataloging in Publication Data

Dictionary of computing.—3rd ed.

p. cm.—(Oxford science publications)

General editor: Valerie Illingworth.

1. Electronic data processing—Dictionaries. 2. Computers—Dictionaries.

I. Illingworth, Valerie. II. Series.

004'.103—dc20 OA76.15.D526 1900 89-26662

ISBN 0-19-286131-X

5 7 9 10 8 6

Printed in Great Britain by
Biddles Ltd
Guildford and King's Lynn

The
the
grow
peop
ing
over
have
of co
puter
and d
puting
a single
associate
comput

algo
prog
prog
data
oper
comput
hardw
comput
inform
comput
major
legal asp

The entire
branches
range from
level comput
tables. The
science and
be a valuab
of computing
A major
the dictionary
Market Hou
and appreci
effort
September 19

LBA

lists are found to differ, without having unnecessarily constructed both lists in toto. See also strictness.

LBA Abbrev. for linear-bounded automaton.

LCA Abbrev. for logic cell array. A form of *PAL in which the programming information is held in a *SIPO *shift register, so that the mode of operation of the device can be read into it when the system of which it is a part is started up. The contents of the register, and therefore the mode of operation of the LCA, remain unchanged while the system is running.

LCC Abbrev. for leadless chip carrier.

LCD Abbrev. for liquid-crystal display. A device incorporated into many digital watches, calculators, some small computers, instruments, etc., in order to display numerical, alphabetical, and sometimes other characters. The display comprises groups of segments from which individual characters can be formed. Each segment consists of a normally transparent anisotropic liquid sandwiched between two transparent electrodes. Application of an electric field across the electrodes causes the reflectivity of the liquid to change and the segment becomes opaque. Individual segments can therefore be selectively darkened to form a character. The digits and some letters are typically produced from groups of seven segments. Unlike *LED displays, LCDs do not generate their own light and thus require external illumination; they do however have a lower current drain than other forms of *display.

LCM Abbrev. for least common multiple.

LCSAJ Abbrev. for linear code sequence and jump. A section of program code that will always be executed in sequence

and followed by a particular sequence. See also control flow graph.

LDU decomposition See LU decomposition.

leader A blank section of a tape, preceding recorded information, that is needed for threading the tape into a reading device.

leadless chip carrier (LCC) A form of *integrated circuit packaging where connections to the device are not made by means of pins extending beneath the device (as for instance in *DIPs), but instead by means of studs arranged around the package's periphery. This means that the device can be inserted into a socket mounted on a PCB.

leaf Short for leaf node.

leaf node (terminal node; tip node; external node) Any node of a tree with no descendants and hence of *degree zero.

least common multiple (LCM) of two integers m and n . The smallest integer p such that m divides p exactly and n divides p exactly. For example, the LCM of 9 and 6 is 18.

least fixed point See fixed-point theorem.

least significant character In a *string where the position of a character determines its significance, the character at the end of least significance. Such a string is normally written with the least significant position on the right. For example, the *least significant digit (LSD)* and the *least significant bit (LSB)* contribute the smallest quantity to the value of a digital or binary number.

least squares, method of A method of estimating *parameters in a model by minimizing the sum of squares of differences between observed and theoretical values of a variable. If

$$y_i, i = 1, \dots, n,$$

is a sample of a set of theoretical values, then the criterion for choosing the best fit is the sum of squares, $\sum (y_i - \hat{y}_i)^2$.

The values of θ that occur are known as *parameters*.

The method is used when estimating a value (location), and minimized is

See also likelihood

least squares estimation See least squares method.

LED display A device consisting of a series of diodes, each of which can be made to glow by applying a current. The diodes are usually arranged in a grid, and the relative intensities of the glowing diodes form the display. Such a display is usually used for displaying numerical data. Seven diodes are used to form the digits 0-9 and some letters.

Lee distance A measure of the difference between two strings of characters. It is the number of positions at which the characters differ. For example, the Lee distance between "abc" and "def" is 3.

MONOID

status of the system to be observed from remote locations.

2. Another name for supervisor, or even a complete operating system.

3. A programming construct devised by Hoare to allow controlled sharing of resources by otherwise asynchronous processes, and involving the provision of controlled passing of variables between the processes.

monoid A *semigroup that possesses an *identity element, e . If S is a semigroup on which there is defined a *dyadic operation \circ , then

$$x \circ e = e \circ x = x$$

for all elements x in S . Monoids play an important role in various areas of computing, especially in the study of *formal languages and *parsing.


monomorphism A *homomorphism that, when viewed as a function, is an *injection.

monostable (one-shot) A digital circuit that has only one stable output state. It is constructed in such a way that it may be triggered by an externally generated signal to produce a single pulse. The time duration of the pulse is specified by the choice of external components, usually a capacitor.

Monte Carlo methods Numerical methods in which randomly generated numbers play a part in the calculations. A probabilistic model is constructed, corresponding to the mathematical or physical problem, and random samples are taken within the model. By taking more samples, a more accurate estimate of the result is obtained. Such methods are used for example on problems in particle physics, evaluation of multiple integrals, traffic problems, and large-scale operational problems generally. See also stochastic process.

Moore machine See sequential machine.

morphism See category.

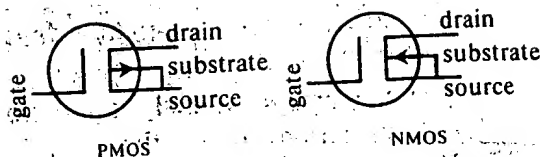

MOSFET circuit symbols

MOSFET (MOS transistor) Acronym for metal oxide semiconductor field-effect transistor. A type of *field-effect transistor that has an insulating layer of oxide, usually silicon dioxide, separating the gate from the drain-source conduction channel in the semiconductor. In an **NMOS** the channel is formed between n-type source and drain by negative charge carriers (i.e. electrons). In a **PMOS** the channel is formed between p-type source and drain by positive charge carriers (i.e. holes). The circuit symbols are shown in the diagram.

MOSFETs require no gate input current, other than a pulse to charge or discharge their input capacitance. They can operate at higher switching speeds and lower currents than *bipolar transistors. However, *integrated circuits fabricated in MOS technology often operate at slower speeds than their bipolar counterparts because of the space allocated to each transistor.

MOS integrated circuit See integrated circuit.

most general common instance See unification.

MOS transistor Another name for MOSFET.

most significant character The character in the most significant position in a number, word, signal, etc. Common examples are the *most significant digit (MSD)* and the *most significant bit*

moth
used

moth
into wh
In some
mother be
tional elem
some of th
be enhance
perform sp
ory extens
communica
sockets on
backplane.

moth-eye

Motorola
primarily
other for
nications
Motorola
field in
major U
chips. TI
ran behi
68000 se
processo
puters a

mouse
by han
moveme
cated t
spondin
the dis
buttons
the cu
tion. I
to the
comm
rather

moven
tion f

movin

(*MSB*), which contribute the greatest quantity to the value of a digital or binary number.

mother *Another name for parent, rarely used.*

mother board A *printed circuit board into which other boards can be plugged. In some microcomputer systems the mother board carries all the major functional elements, e.g. the processor and some of the memory; the function can be enhanced by additional boards that perform specific activities such as memory extension or disk control and that communicate to the mother board via sockets onto a standard bus. *See also* backplane.

moth-eye *See* microrelief.

Motorola A US communications firm primarily devoted to automobile and other forms of mobile wireless communications and entertainment radios. Motorola entered the semiconductor field in the late 1950s and is now a major US manufacturer of VLSI design chips. The Motorola 6800 was an also-ran behind the Intel 8080. The Motorola 68000 series of high-performance 16-bit processors is widely used in microcomputers and workstations.

mouse A *pointing device that is moved by hand around a flat surface; the movements on the surface are communicated to a computer and cause corresponding movements of the cursor on the display. The mouse has one or more buttons to indicate to the computer that the cursor has reached a desired position. It is normally connected by cable to the computer; a "tail-less" mouse communicates by means of infrared rather than electrical signals.

movement file *Another name for* transaction file.

moving-average methods *See* time series.

MPU *Abbrev. for* microprocessor unit, the primary control and arithmetic element of a microcomputer system. *See* microprocessor.

MSD, MSB *Abbrevs. for* most significant digit, most significant bit.

MS-DOS An operating system developed by Microsoft Corp. for computers using the Intel 16- and 32-bit family of microprocessors. It provides a set of software services for programs running in a single-user environment and a simple command line interpreter as its user interface. A major facility is a set of services for managing files and I/O devices. It is the system most often run on the IBM PC and similar machines, although its inability to address more than 640 kilobytes of memory means that it will be gradually eclipsed by newer systems such as *OS/2.

m-sequence A periodic sequence of symbols generated by a linear *feedback shift register whose feedback coefficients form a primitive *polynomial. A * q -ary register (with q prime) whose generating polynomial is of degree n will have period $q^n - 1$, provided that the initial state is nonzero, and its contents will proceed through all the nonzero q -ary n -tuples. The termwise modulo- q sum of two m-sequences is another m-sequence: the m-sequences (of a given generating polynomial), together with the zero sequence, form a *group.

The term is short for maximum-length sequence. It is so called because the generating shift register only has q^n states, and so such a register (with arbitrary feedback logic) cannot generate a sequence whose period exceeds q^n . But with linear logic the zero state must stand in a loop of its own (*see* Good-de Bruijn diagram) and so the period of a linear feedback register cannot exceed $q^n - 1$. This period, which can be achieved when and only when the poly-